RJL STEALTH / SITE SECURITY

STEALTH

SOLAR CCTV FOR HIRE

Solar-powered site CCTV with 4G access, local recording, two-way audio and an integrated siren and strobe.

01 **Solar + battery power**

02 **Three Dahua PTZ options**

03 **Magic Keys portal access included**



STEALTH UNIT CONCEPT

WEEKLY EQUIPMENT HIRE

PER UNIT / INC GST

ESSENTIAL	PLUS	PRO
$79	$99	$129
5× optical	25× optical	32× optical


Indicative rates. Site works, mobile data and optional services are quoted separately.

THE STEALTH UNIT

Every tier uses the same charcoal and RJL-red unit design. Select the camera, then match the power and mounting to the site.

STEALTH ASSEMBLY

PRODUCT CONCEPT

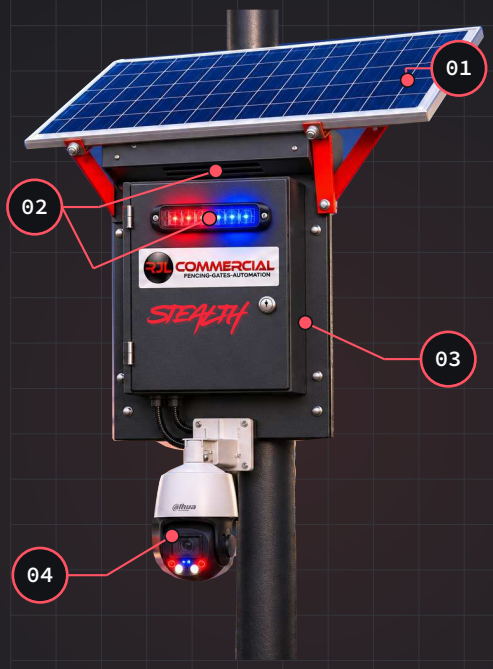

POWDER-COATED FINISH

Charcoal / RJL red

NUMBERED ITEMS SHOWN AT RIGHT

STANDARD EQUIPMENT PER UNIT

01 **Solar array + controller**
Solar panel, charge controller and protected charging cabling.

02 **Siren, strobe + speaker**
Siren under the solar panel, front red/blue strobe and separate concealed speaker.

03 **RJL cabinet + post**
Straight-edged, powder-coated cabinet and post with protected cable routing.

04 **Dahua PTZ camera + bracket**
One camera from the selected tier with its mounting bracket.

05 **Battery + protected DC power**
Battery bank, DC conversion and circuit protection for unit equipment.

06 **4G connection hardware**
Router and antenna on Essential and Plus. Camera-integrated 4G on Pro.

07 **Local recording card**
One compatible microSD card. The quote specifies capacity and recording settings.

08 **Prep, portal access + support**
Agreed camera settings, Magic Keys access and remote technical help during hire.

Two-way audio on every tier

Essential and Plus use built-in camera microphones. The Pro package includes an external microphone. The concealed speaker uses an amplified audio path tested at commissioning.

Base and fixings, on-site commissioning and SIM/data charges are itemised separately.

CHOOSE YOUR CAMERA

Choose the camera that suits your viewing distance and site layout. All three tiers include the STEALTH unit and its deterrence hardware.

ESSENTIAL 01



SD3E405DB-GNY-A-PV1

5×

OPTICAL ZOOM

Lens	**2.7-13.5 mm**
IR*	**50 m**
White light*	**30 m**
Tracking	**Auto Tracking Lite**

Entrances and compact sites

A wider starting view for small compounds and activity close to the camera.

$79 / WEEK INC GST

PLUS 02



SD4E425MB-HNR-A-PV1

25×

OPTICAL ZOOM

Lens	**5-125 mm**
IR*	**100 m**
White light*	**50 m**
Tracking	**WizTracking**

Yards and longer approaches

More optical reach for viewing across larger yards and along access routes.

$99 / WEEK INC GST

PRO 03



SD6C3432GB-HNR-AGQ-PV1-EAU

32×

OPTICAL ZOOM

Lens	**4.8-154 mm**
IR*	**150 m**
White light*	**50 m**
Tracking	**Auto Tracking 3.0**

Longer sightlines

The longest optical reach in the range, with 4G built into the camera.

$129 / WEEK INC GST

Plan the view around your site

A PTZ camera points in one direction at a time. Where coverage must be continuous, a fixed camera may be needed for critical areas.

* Dahua illumination maxima. Identification and detection range vary by site and camera settings. [1-3]

CAMERA SPECIFICATIONS

Dahua publishes the following figures for the three cameras. RJL configures and commissions the assembled STEALTH unit for each site.

SPECIFICATION	ESSENTIAL [1]	PLUS [2]	PRO [3]
Image resolution	4 MP / 2560 × 1440	4 MP / 2560 × 1440	4 MP / 2560 × 1440
Image sensor	1/2.8 in CMOS	1/2.8 in CMOS	1/2.8 in CMOS
Optical zoom	**5×**	**25×**	**32×**
Lens range	2.7-13.5 mm	5-125 mm	4.8-154 mm
Horizontal field of view	94.9°-30.1°	51.9°-3.0°	55.8°-2.3°
IR / white illumination	50 m / 30 m	100 m / 50 m	150 m / 50 m
Target tracking	Auto Tracking Lite	WizTracking	Auto Tracking 3.0
Pan movement	0°-355°	360° continuous	360° continuous
Camera audio	Built-in mic and speaker	Built-in dual mic and speaker	External mic input and built-in speaker
microSD support	Up to 512 GB	Up to 512 GB	Up to 512 GB
Camera IP rating	IP66	IP67	IP66
Camera net weight	1.5 kg	2.6 kg	4.2 kg
Maximum camera draw	15 W	16 W	18 W
Camera power input	12 V DC / PoE+	12 V DC / PoE+	12 V DC
4G arrangement	External router in unit	External router in unit	Built into camera

Shared camera features


All three support human and vehicle classification, audible alarms, red/blue lights, H.264/H.265 and ONVIF. The STEALTH siren, strobe and audio kit are separate unit hardware. [1-3]

Camera power and IP ratings apply to the camera. The quote specifies the supplied card and assembled unit configuration.

POWER + CONNECTIVITY

We size the solar system, choose the mobile connection and set the recording profile around how the site will operate.

01




SOLAR + BATTERY

Panel output and battery capacity are sized for the camera, connectivity, audio, alarms and electrical losses. Sun exposure and shading affect the design.

WHAT THE QUOTE SPECIFIES

Panel wattage, usable battery energy, charge controller, mounting and operating profile.

02

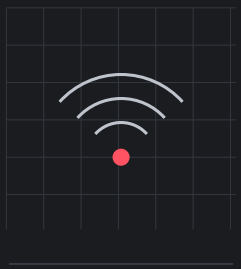


4G + REMOTE ACCESS

Essential and Plus use a separate 4G router. Pro has integrated 4G. Some integrations may need an extra gateway. Carrier, antenna position and SIM/data allowance are selected for the site.

DATA EXAMPLE AT 2 Mb/s

About 0.15 GB for 10 minutes of live video, or 0.90 GB per hour, before network overhead.

03

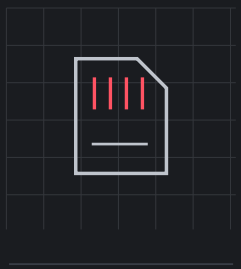

LOCAL VIDEO RECORDING

The supplied microSD card records continuously or on events, as agreed. Card size, bitrate, activity and overwrite settings affect how long footage is kept.

RETENTION EXAMPLE AT 2 Mb/s

A 256 GB card holds about 11.9 days of constant video before formatting and other overhead.

Runtime and remote access depend on the site design, solar conditions and mobile service. Cloud storage and additional recorders are separately quoted options.

VIEW YOUR SITE REMOTELY

Every STEALTH hire includes Magic Keys portal access. The commissioned camera app also provides live viewing, alerts and local playback.

MAGICKEYS

PORTAL ACCESS INCLUDED

SITE PORTAL

- Overview
- **Site cameras**
- Access control
- Team access
- Event review

SITE CAMERAS — ILLUSTRATIVE VIEW



- Entrance gate



- Materials yard



- Warehouse



- Civil works



- Perimeter



- Construction

VIEW / PTZ | TALK | SIREN | EVENTS

INCLUDED WITH HIRE

Magic Keys portal

Authorised users receive Magic Keys access for their site. RJL confirms available camera views and controls for the installed configuration at handover.

AT HANDOVER

Camera app

View live video, move the PTZ camera, receive configured alerts, use two-way audio and play back local recordings.

Siren, strobe and talk-down

Agreed event rules can trigger the siren and front strobe once the alarm interface is commissioned. RJL tests the alarm and concealed speaker during handover.

Staffed alarm monitoring and patrol response are quoted separately.

STEALTH HIRE PRICING

Indicative equipment hire in Australian dollars per unit, including GST. Your quote sets out the equipment, hire period and site-specific charges.

EQUIPMENT HIRE	ESSENTIAL	PLUS	PRO
Weekly rate	**$79**	**$99**	**$129**
12-week hire	**$948**	**$1,188**	**$1,548**
26-week hire	**$2,054**	**$2,574**	**$3,354**
52-week hire	**$4,108**	**$5,148**	**$6,708**

Proposed minimum hire is 12 weeks. Examples use the same weekly rate throughout. The totals cover equipment hire only.

IN THE EQUIPMENT HIRE

- Selected Dahua camera and bracket
- Solar, battery and charging equipment
- RJL cabinet and post assembly
- 4G hardware and local recording card
- Siren, strobe and concealed audio kit
- Magic Keys portal access
- Equipment prep and remote support

QUOTED SEPARATELY

- Delivery, installation and collection
- Base, footings, fixings and access equipment
- On-site commissioning and extra attendance
- SIM, data plan and excess usage
- Staffed monitoring and patrol response
- Cloud storage and additional recorders
- Custom integrations, if requested

Your total hire cost

Equipment hire plus deployment, mobile data and any selected extras. The unit remains RJL property. The hire agreement sets out the damage, loss, cancellation and service terms.

PLAN YOUR SITE HIRE

Send the site address, an annotated plan and the areas you need to see. RJL will scope the camera, power and deployment for your site.

01

Plan the view

Confirm the target areas, viewing distance, mounting, sunlight and mobile coverage.

02

Agree the scope

Choose the camera, hire period, recording and data plan. Review the itemised quote.

03

Commission + hand over

Check live view, alerts, recording, audio and the alarm. Confirm users and Magic Keys access.

REQUEST A STEALTH QUOTE

0400 101 132

info@rjlcommercialgroup.com

rjlcommercialgroup.com

Melbourne-based. Deployment is quoted to your site location.

VISIT RJL ONLINE

DAHUA SPECIFICATION SOURCES

[1]	**Essential / SD3E405DB-GNY-A-PV1**	VIEW SPECIFICATION →
[2]	**Plus / SD4E425MB-HNR-A-PV1**	VIEW SPECIFICATION →
[3]	**Pro / SD6C3432GB-HNR-AGQ-PV1-EAU**	VIEW SPECIFICATION →

Camera specifications checked 8 November 2026. Camera images are from Dahua. The STEALTH unit and Magic Keys screens are illustrative.

RJL confirms the supplied model, dimensions, panel and battery capacities, enclosure rating, alarm output and expected runtime for the agreed configuration.

RJL Commercial Fencing and Gates (VIC) Pty Ltd